

Hydraulic Rams



FABRICATION FRANCAISE

▼ Hydraulic Rams VHED300, VHED500, VHED700.



ISO 9001



Use the force of
HYDR'AM
hydraulic rams
for pushing and
lifting

DESCRIPTION


Can be used in wet conditions
Compact unit in hardened high tensile light alloy.

Unit comprises of:

- 1 Double acting cylinder.
- 1 Ergonomically shaped operating handle and valve, with integral safety device and pilot operated check valves.
- 1 Set of hoses 0.5m long with automatically locking, anti-pollution, HP quick couplers fitted with metallic protection plugs.
- Pressure relief valve for hose on coupler end.

OPTION

- Equipment for use in traction (Length +60 mm)

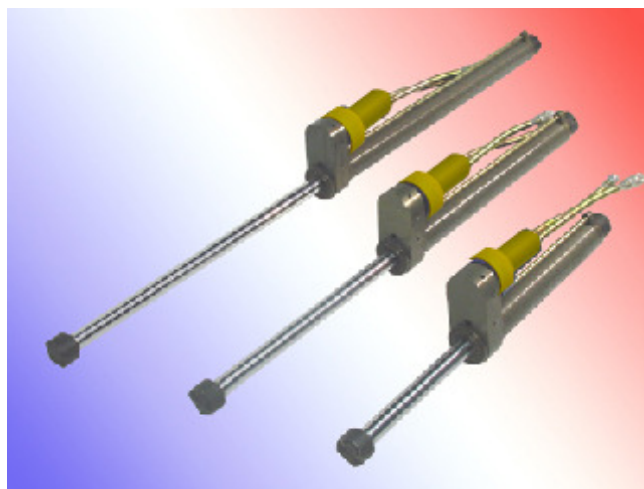

CARACTERISTIQUES

Model	VHED 300	VHED 500	VHED 700
Operating pression	700 b	700 b	700 b
Max.spreading force	137 kN	137 kN	137 kN
Stroke	300 mm	500 mm	700 mm
Minimum length	498 mm	698 mm	898 mm
Maximum length	798 mm	1198 mm	1598 mm
Approx. Weight	13 kg	16 kg	19 kg
Dimensions (mm)	195x90x498	195x90x698	195x90x898
Compliance	EN/NFPA	EN/NFPA	EN/NFPA

Powerful, Lightweight and Reliable in Rescue Operations

NO CONTRACTUAL DOCUMENT



Chemin du Lyonnais - 69720 St Bonnet de Mure FRANCE- 33 (0) 4 72 48 90 05 - fax:33 (0) 4 72 48 90 03

☎:Site : www.hydram.com - E-mail : hydram@wanadoo.fr