

# Bearing Cup and Bearing Pullers

▼ Shown: BHP-380



## Bearing Cup Puller

- Made of high strength steel alloy
- Easily adapted to Cross Bearing Pullers for fast and efficient removal of the most difficult parts
- Adjustable to fit a variety of bearings and seals

## BHP Series



Capacity:

**8, 20, 30 and 50 ton**

Maximum Reach:

**110 - 145 mm**

Spread Range:

**110 - 359 mm**

Maximum Operating Pressure:

**700 bar**

### ▼ SELECTION CHART

Capacity		8 ton	20 ton	30 ton	50 ton
<b>30 Bearing Cup Puller</b>					
Model Number		<b>BHP-180</b>	<b>BHP-280</b>	<b>BHP-380</b>	<b>BHP-580</b>
Spread**	Max.	110	220	359	359
	Min.	26	25	50	50
Reach**	Max.	110	140	145	145
	Center Screw Thread	3/4"- 16 UNF	1"- 8 UNC	1 1/4"- 7 UNC	1 5/8"- 5.5



### CAUTION

Not all puller components and configurations are rated at the set capacity.


Please contact Enerpac for specific details.

▼ Shown: BHP-382




## Bearing Puller

- Made of high strength steel alloy
- Wedge-shaped edges allow removal of the most hard-to-grip components
- Easily adapted to Cross Bearing Pullers for fast and efficient removal of the most difficult parts

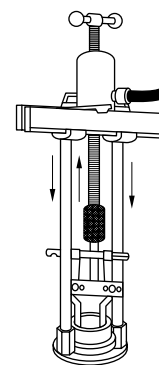

◀ Bearing Cup Puller shown with Crosshead Puller Attachment.



Bearing Puller shown with Crosshead Puller Attachment. ▶

### ▼ SELECTION CHART

Capacity		8 ton	20 ton	30 ton	50 ton
<b>40 Bearing Puller</b>					
Model Number		<b>BHP-181</b>	<b>BHP-282</b>	<b>BHP-382</b>	<b>BHP-582</b>
Spread**	Max.	104	130	245	245
	Min.	25	9	17	17
Width**		126	150	264	264
Thread		5/8"-18 UNF	5/8"- 18 UNF	1"- 14 UNS	1 1/4"- 12 UNF

\*\* Dimensions are in mm.



### Bearing Puller

Bearing Puller has wedge shaped edges for placing puller behind hard to reach bearings, gears, etc., where clearance prevents direct application of grip puller arms.

The Bearing Puller can be used with the Cross Bearing Puller or the Grip Puller.