



7313

714  
Fed. Spec.:  
GGG-P-480

# Retaining Ring PLIERS

## Internal and External

### HORSESHOE LOCK RING PLIER

• For removing horseshoe lock rings used on hydraulic brakes, differentials, etc. Plier is 203mm long; max. spread: 23,8mm

**No. 714** – Horseshoe lock ring plier. Wt., 0,2 kg.

**No. 7313** – External snap ring plier easily removes snap rings used to retain bearings on shafts. Max. spread: 27mm.

### RETAINING RING PLIER KITS

• Choose from four sets; internal ring, external ring and convertible pliers for either internal or external rings.

**No. 7053K** – Replaceable tip pliers kit. This versatile kit contains (1) internal and (1) external pliers with (8) tip sets. Two sets each: 0,9 mm dia. 90° bend, 1,2 mm dia. straight, 1,2 mm dia. 90° bend, 1,8mm dia. straight. Recommended for 6,4 –51 mm rings. Packaged in plastic storage case. Wt., 0,3 kg.

**No. 15702** – Replaceable tip kit (only for No. 7053K.


**No. 7123K** – Convertible pliers kit. Contains **No. 1120** (1mm dia./straight tip) and **No. 1340** (1,8mm dia./straight tip). Each pliers "converts" to handle both internal and external rings. Packaged in a reusable plastic storage case. Wt., 0,4Kg.

**No. 7125K** – Convertible pliers kit. Contains **No. 1125** (1 mm dia./45° bent tip) and **No. 1345** (1,8 mm dia./45° bent tip). Each pliers "converts" to handle both internal and external rings. Packaged in a reusable plastic storage case. Wt., 0,4kg.


**No. 7406K** – Professional pliers kit. Contains (6) retaining convertible pliers to handle both internal and external rings from 6,4–51 mm. Includes straight and 90° off-set pliers with 1, 1,2, and 1,8 mm tip diameters. Includes Nos. 1120, 1131, 1320, 1329, 1340 and 1349. Packaged in an impact resistant storage case. Wt., 0,9 kg.

### REPLACEMENT TIPS FOR 7300 AND 7301 PLIERS

**No. 209201** – Replacement tips (pr.) for the 7300 and 7301 pliers. Wt., 0.1 kg.



7053K  
internal &  
external  
plier, 4 sizes  
of tips.




7123K



7406K

### RETAINING RING PLIERS SELECTION GUIDE

Plier No	Tip .Bend	Tip Size Dia. (mm)	For Int'l Rings* Bore Dia. (mm)	For External Rings* Shaft Dia. (mm)
0100	Str.	1	9,5 – 26	—
0200	Str.	1	—	6,4 – 22
0300	Str.	1,8	27 – 44,5	—
0400	Str.	1,8	—	24 – 36,5
0500	Str.	2,3	46 – 89	—
0600	Str.	2,9	—	38 – 89
7300	Str.	3	78 – 152	—
7301	Str.	3	—	38 – 165
<b>Convertible Pliers</b>				
1120	Str.	1	9,5 – 14	6,4 – 17
1125	45°	1	9,5 – 14	6,4 – 17
1131	90°	1	9,5 – 14	6,4 – 17
1320	Str.	1,2	16 – 26	17 – 22
1329	90°	1,2	16 – 26	17 – 22
1340	Str.	1,8	27 – 44,5	24 – 36,5
1345	45°	1,8	27 – 44,5	24 – 36,5
1349	90°	1,8	27 – 44,5	24 – 36,5

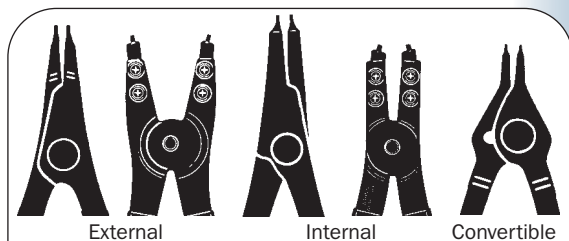

External	Internal	Convertible
No. 0200	No. 0300	No. 1120
No. 0400	No. 0500	No. 1320
No. 0600		No. 1340
		No. 1125*
		No. 1345*
		No. 1131**
		No. 1329**
		No. 1349**

Fed. Spec.: GGG-P-480-E

\* 45° Angled Tips      \*\* 90° Angled Tips

Always wear safety goggles when using pliers

\*Capacities are shown for basic style rings.